





Pump Initiation Board

PIB-DS-12/19-1

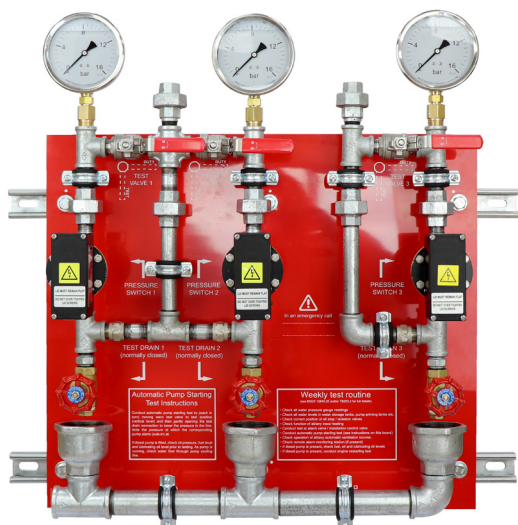

-  Compact Design
-  Fast Fit
-  BS EN-12845


Overview

The compact design, fast-fit initiation boards are designed for testing of sprinkler system pump initiation pressure switches in compliance with BS EN12845 & LPC sprinkler rules. For each main pump there are two pressure switches and a single switch for the jockey pump. Each pressure switch can be isolated so its function and cut-in pressure can be verified during system servicing. Boards can be customised to include your company logo, contact details and a QR link for a how-to instruction video.

Specification

Board Material.....4mm Aluminium Composite
 Board Mounting.....Unistrut
 Pipework.....Galvanised Steel
 Ball valves.....Lockable type
 Gauges.....Glycerine, no loss connectors
 Non-return Valves.....Spring Loaded type
 Gate Valves.....Brass, with Control Orifice
 Pressure-switches.....Bailey & Mackey
 Connections IN.....Inlet Unions ½" (15 mm) BSP
 Drain Connection OUT.....1" (25mm)
 Pressure rating.....14 bar

Dimensions

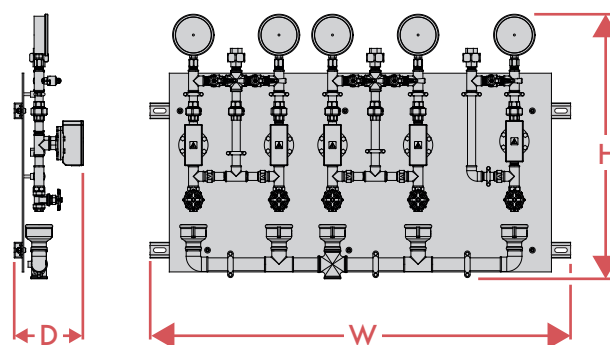

Order		Pressure Switches		Dimensions		
Model	Code	Fire-Pump	Jockey	H	W	D
2-Way	PIB-2WAY	2	1	700	690	180
3-Way	PIB-3WAY	4	1	700	1100	180
4-Way	PIB-4WAY	6	1	700	1450	180

mm